



FluorideTRAP™

Automatic Fluoride Removal System



CASCADIAN® FluorideTRAP™ Automatic Fluoride Removal System

- High Capacity NSF Approved Resin
- NON-CORROSIVE MEDIA AND SALT TANKS
 - 400 lb. Salt capacity (18" d X 40" h)
- 70-SSXT AUTOMATIC CONTROL VALVE
 - Dependable Automatic Operation
 - Efficient 1.25" Meter initiated regeneration to save salt and water
 - Time Tested Balanced Construction
 - Non-corrosive Materials
 - Solid state microprocessor with LED display
 - No memory loss on power out
 - Vacation mode
- Flow rates to 16 gpm (16" Dia. Tank)
- High flow 1", 1.25" or 1.5" connections and bypass
- Available in black or almond

Note: Equipment Model, Size and Colors
May Vary From Photo



✓Protect


✓Prevent

✓Save



FluorideTRAP™

Automatic Fluoride Removal System

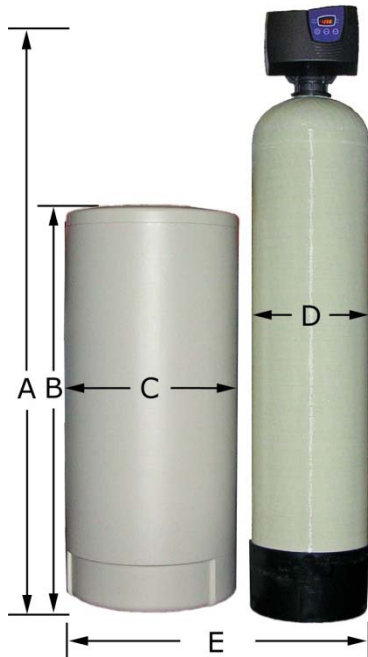

CASCADIAN® FluorideTRAP™							
Part #:	Tank Size (inch)	*Flow Rate GPM	Dimensions in inches				
			A	B	C	D	E
FLTRAP-09EM	9 X 48	2 - 4	55	40	18	9	37
FLTRAP-10EM	10 X 54	3 - 6	61	40	18	10	38
FLTRAP-12EM	12 X 52	4 - 8	59	40	18	12	40
FLTRAP-13EM	13 X 54	5 - 10	61	40	18	13	41
FLTRAP-14EM	14 X 65	6 - 12	72	40	18	14	42
FLTRAP-16EM	16 X 65	8 - 16	72	40	18	16	44

- a) *Service flow rate affected by water chemistry.
- b) Additional treatment may be required. Consult with CASCADIAN® for recommendations and sizing assistance.
- c) Ask your water treatment professional about complete solutions from CASCADIAN®.

Built with the Best!

Built to Last!

Ask Your Professional CASCADIAN® Distributor For Full Warranty Details

Available From: